



# Universal Dry Fix Ridge System

## Product Information Sheet

Box dimensions: H 305mm x W 300mm x D 300mm

Box weight: 6kg

### TIL-R Rollable Ridge Vent

#### Material

Vapour permeable technical fabric with a corrugated aluminium strip down each edge, with a 2.5cm butyl strip attached to the underside. Aluminium and technical fabric glued and sewn together with threads resistant to environmental factors.

Polyester lacquer coating - 15-25 µm

#### Colour

Black RAL 9005

#### Dimensions

Width: 300mm Length: 6m



### TIL-R Ridge Union

#### Dimensions

Thickness: 1.5mm

#### Material

Polyethylene

### TIL-R Ridge Union Clip

#### Dimensions

Length: 43.5mm

#### Material

Polyamide



### TIL-R Ridge Batten Bracket

#### Dimensions


Thickness: 1.5mm

Zinc Coating: 10 µm

Bracket Spacing: 30mm, 40mm, 50mm

#### Material

Perforated steel strip type S235JRG2 according to PN-EN 10027-2:1994

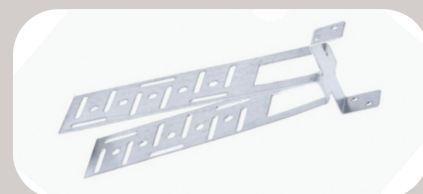

### Screw

#### Dimensions

Length: 100mm

#### Material

Stainless Steel

### Clamping Plate

#### Dimensions

Thickness: 1mm

Width: 24mm

Length: 50mm

#### Material

Stainless Steel



### Sealing Washer

#### Dimensions

Outside diameter: 12mm

Inside diameter: 5.3mm

#### Material

A2 Stainless Steel  
and Grey EPDM Sealer



Harding Way, St Ives, Cambridgeshire, PE27 3YJ Tel: 01480 466 777 Fax: 01480 290 133

Email: info@til-r.co.uk Website: www.til-r.co.uk