




# Lead Free Flashing Self Adhesive

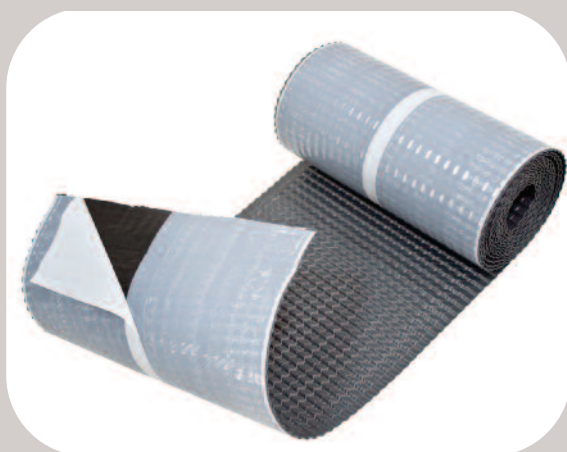


## Installation Guide

Suitable for most roof applications i.e. slates, flat and profiled tiles, flat and complex joints.

Product Types (Sold separately)	Type	Finish	Length	Width	Product Codes
	TIL-R Lead Free Flashing	Textured	6m	150mm	280160000/10401201
	TIL-R Lead Free Flashing	Textured	6m	200mm	280160005/10401202
	TIL-R Lead Free Flashing	Textured	6m	300mm	280160010/10401203
	TIL-R Lead Free Flashing	Textured	6m	400mm	280160015/10401204
	TIL-R Lead Free Flashing	Smooth	6m	150mm	280160020/10401205
	TIL-R Lead Free Flashing	Smooth	6m	200mm	280160025/10401206
	TIL-R Lead Free Flashing	Smooth	6m	300mm	280160030/10401207
	TIL-R Lead Free Flashing	Smooth	6m	400mm	280160035/10401211


## General Notes

- For use as a chimney flashing a textured finish is recommended to prevent water ingress.
- Before work is undertaken all areas of application should be accurately measured.
- Surfaces should be dry, oil and dust-free. If a surface is unstable a bituminous primer should be applied.
- For chimney application the lower side of the protective film should be removed first, before positioning to the surface material.
- Additional butyl glue may be applied to the flashing, although this is not deemed necessary for most applications.
- Tiles surrounding a chimney may be cut, if required. Tile edges should be smooth at the point of contact with the flashing.




## Installation Procedure


1. For pitched roofs, the exterior face of the chimney should be completed first, followed by the sides and finally the rear.

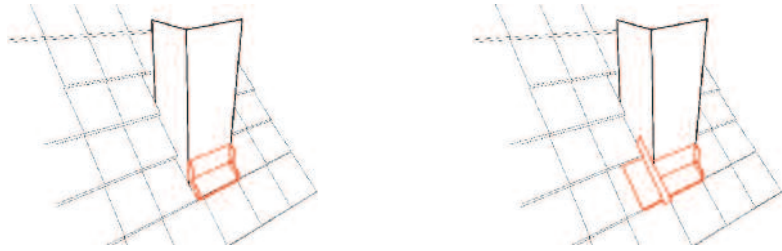

2. Flashing to all chimney faces should be joined by folding. Joints should have a minimum overlap of 100mm.

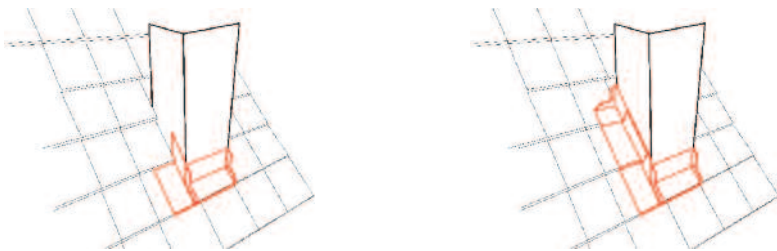

3. On side faces it is recommended that flashing is applied to each tile or slate separately.



4. A roller is recommended to finish the application. It is also recommended to apply a roofing sealant to the connection at a chimney junction.



# TILER

Harding Way,  
St Ives,  
Cambridgeshire,  
PE27 3YJ

Tel: 01480 466 777

Fax: 01480 290 133

Email:  
info@til-r.co.uk

Website:  
www.til-r.co.uk