



# Lead Free Flashing Self Adhesive

## Product Information Sheet

**TIL-R  
Lead Free  
Flashing  
Self  
Adhesive**

**Length:** 6m  
**Widths (4 available):**  
150mm, 200mm, 300mm, 400mm  
**Finish:** Smooth

**Material**

Flat aluminium strip: EN AW-3005 in accordance with PN-EN 573-1:2006 or EN AW-1100 in accordance with PN-EN 1396:200.


**Thickness of the aluminium strip:** 0.14 mm

**Type of coating:** Polyester lacquer coating

**Thickness of the coating:** 10 µm

**Type of glue:** Butyl glue

**Colour:** Graphite RAL 7016

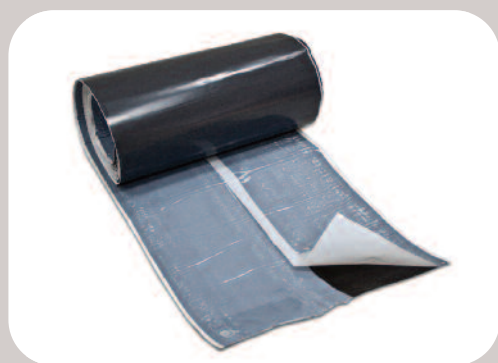

**TIL-R  
Lead Free  
Flashing  
Self  
Adhesive**

**Length:** 6m  
**Widths (4 available):**  
150mm, 200mm, 300mm, 400mm  
**Finish:** Textured

**Material**

Material: Corrugated aluminium strip: EN AW-3005 in accordance with PN-EN 573-1:2006 or EN AW-1100 in accordance with PN-EN 1396:200.

**Thickness of the aluminium strip:** 0.14 mm

**Type of coating:** Polyester lacquer coating

**Thickness of the coating:** 10 µm

**Type of glue:** Butyl glue

**Colour:** Graphite RAL 7016

