


Check Kerb Trim

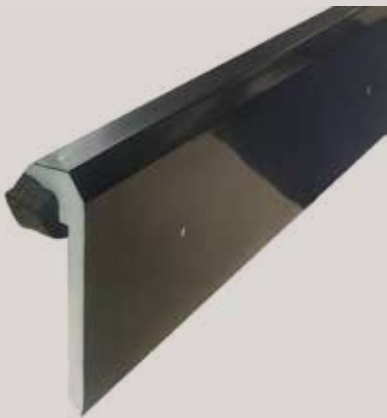

Features & Benefits

- **Creates a 20mm upstand at the roof edge**
- **Smooth, hi-gloss finish - easy to keep clean and great looking**
- **10mm x 15mm sealing compression foam, factory fitted to the underside of the trim to create a water tight seal to the membrane, over seams and detailing joints**
- **Pre-drilled fixing holes, for accurate and fast installation**
- **Complete range of colour matched joints and corner accessories**

Description

FIX-R Check Kerb Trim increases the installation ease, speed and improves the appearance of your roof edge.

This trim features a compression seal along the underside to create a water tight seal to the FIX-R EPDM membrane. This trim eliminates the need for creating a timber upstand as a water check at the roof perimeter.


Manufactured from co-extruded u-PVC creating a solid foam construction with hard wearing, durable properties. This is the same technology as used in u-PVC fascia manufacture.

Intended Uses

For creating a water check to flat and low sloping roofs with FIX-R EPDM membrane.

Installation

- 1) Before installation of the membrane, ensure a solid fixing can be achieved at the perimeter of the roof. A timber fixer can be installed if required.
- 2) Install the membrane to the roof surface as per specifications.
- 3) Ensure the membrane extends down the vertical edge of the roof by a minimum of 50mm.
- 4) Position the edge trim onto the roof surface so the sealant foam is compressed by 30% and the face of the trim is in a vertical position.
- 5) Using the 50mm PolyTop nails fix the edge trim into position. A fixing must be in each pre-drilled hole to achieve correct installation.
- 6) Position the next length of front plate leaving a 1mm expansion gap for each metre of trim used. Ensure that each trim has foam seal extending up the end to create a seal between trim lengths.
- 7) Fit the cover clips at each joint between lengths of trim.
- 8) Install corners or stop ends where needed.

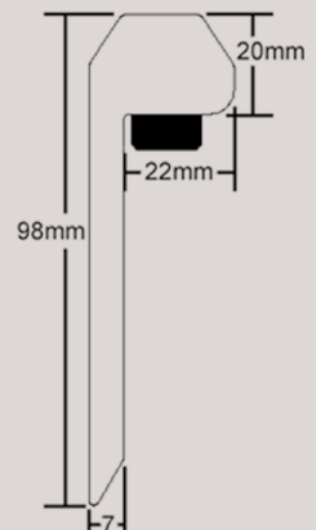

Typical Properties & Characteristics

Material	Co-extruded u-PVC
Colour	Black or white
Trim Length	2.5m
Additional Components	Trim Joints, Internal Corners, External Corners



Harding Way,
St Ives,
Cambridgeshire,
PE27 3YJ

Tel: 01480 466777
Fax: 01480 290133

Email: info@fix-r.co.uk
Web: www.fix-r.co.uk