


FABRIC 10

FIX-R
CLASSIC

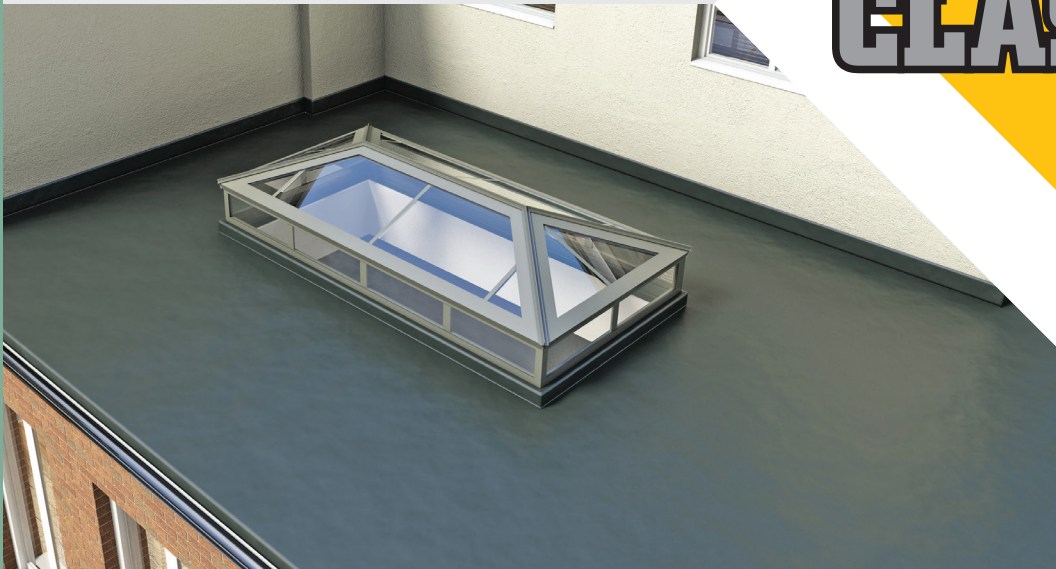

A non-woven, spun-bound, polypropylene reinforced fabric.

Description

FIX-R Classic Fabric 10 is a non-woven, spun-bound, polypropylene reinforced fabric.

Recommended For

For use when applying FIX-R Classic Liquid 10 over existing Built-Up Felt and Asphalt Roofs.

Application Procedure

Fabric 10 is applied between two coats of FIX-R Classic Liquid 10.

Can be used in the following conditions:

- ◆ Temperature Range: 5-35°C
- ◆ Relative Humidity: <85%

Packaging and Shelf Life

Fabric 10 is supplied in white rolls 25m x 1m

Storage

Fabric 10 must be kept in a cool and dry place, at temperatures of between 5-25°C.

- ◆ Made of 100% polypropylene material at high temperature and spun-bound
- ◆ Non-toxic, non-irritant
- ◆ Made from materials conforming to FDA Standard requirements
- ◆ No other chemical composition, stable, non-toxic, no smell, safe for sensitive skin

Safety

Fabric 10 is a non-hazardous material.

Technical specification

Material	100% Polypropylene
Colour	White
Technology	Spunbound

	UNIT	FIX-R CLASSIC FABRIC 10	
Weight	g/sq.m	50	
Colour		White	
Thickness	Mm	0.38	
Tensile Strength	n/5cm	MD	104
		CD	89
Elongation	%	MD	70
		CD	80

Certified quality, environmental and occupational health & safety management systems:
ISO 9001/14001 & OHSAS 18001.



Harding Way, St Ives, Cambridgeshire, PE27 3YJ
Tel: 01480 466 777 Fax: 01480 290 133
Email: info@fix-r.co.uk Website: www.fix-r.co.uk