




PRODUCT DATA SHEET

PS Walkway Pads

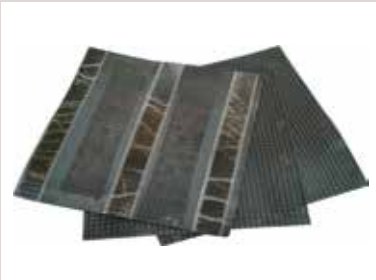

Features & Benefits

- **Excellent tear and puncture resistance**
- **UV resistant**
- **Slip resistant**

Description

FIX-R Pressure-Sensitive Molded Walkway Pads are designed to protect the membrane in those areas exposed to repetitive foot traffic.

Intended Uses

1. Walkways must be installed at all traffic concentration points (i.e. roof hatches, access doors, rooftop ladders, etc.) regardless of traffic frequency.
2. Walkways must also be installed if regular maintenance (once a month or more) is necessary to service rooftop equipment.

Application*

1. Remove excess dust and dirt from the membrane by wiping with a clean rag. To remove accumulated dirt, footprints, etc., scrub the membrane sheets with warm low-foaming soap and water and rinse with clean water.
2. Clean the dry membrane surface by scrubbing with clean natural fibre rags using Weathered Membrane Cleaner. Use FIX-R Primer to prime EPDM Membrane when adhering pads.
3. Adhere Walkway Pads using FIX-R Primer. Apply primer to deck surface where tape will contact deck surface.
4. Allow a 25mm wide break between Walkway Pads. Discontinue Walkways over field splices allowing a minimum 25mm gap.

* REVIEW CURRENT SPECIFICATIONS AND DETAILS FOR SPECIFIC APPLICATION REQUIREMENTS.

Precautions

The product is to be used as a walkway only and is not designed as a substitute for ballast. Walkway Pads cannot be installed within 10' (3 m) of the roof perimeter or on projects which exceed 50' (15 m) in height. Concrete pavers may be used in these areas. When installing walkways in conjunction with ballast, avoid the entrapment of small ballast below walkways.

PS Walkway Pads

Typical Properties & Characteristics

Colour	Black
Pad Thickness	Min- 4.1mm Max- 5.1mm
Performance requirements Density, pct	70
Tensile Strength, psi ASTM D 412 Unaged	500
Tear Resistance, ppi ASTM D 624 Unaged	250
Size	760mm x 760mm (30" x 30")



Harding Way,
St Ives,
Cambridgeshire,
PE27 3YJ

Tel: 01480 466777
Fax: 01480 290133

Email: info@fix-r.co.uk
Web: www.fix-r.co.uk