


# FIXER

# FIX-R Bitumen Primer

**BITUMINOUS WATERPROOFING  
PREPARATION**

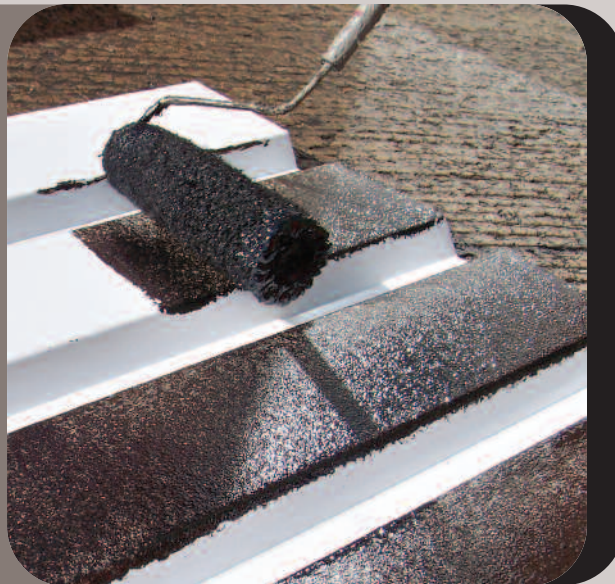

**SEAL AND PREPARE SURFACES  
FOR BITUMINOUS  
WATERPROOFING PRODUCTS.**

### **Description**

Bitumen priming solution designed to seal and prepare surfaces for the application of bitumen waterproofing products and systems.

Drying time at 20°C approximately 2–3 hours, depending on the substrate and the weather conditions.

## Directions for use

May be applied to many substrates including concrete, brickwork, metal and existing bitumen roofing. For use with bitumen membranes and liquid FIX-R maintenance products.

**Note:** Bitumen Primer is not rust inhibitive; bare metal should first be coated with a rust inhibiting primer.

### Application

The substrate needs to be sound, clean and grease-free.

Should algae or fungi be present, this must be removed with a stiff broom and the surface treated with Algae and Fungi Remover. Apply FIX-R Bitumen Primer in one coat with a brush, roller or airless spray gun.

Make sure the primer is dry before applying bituminous membranes or liquid FIX-R products.

**Note:** Use only in well-ventilated areas, or with respiratory apparatus, away from all sources of ignition. Precautions must be taken to prevent the solvent vapour entering the ventilating systems of buildings.

### Properties

	Test Method	Criteria
Volume mass (g/cm <sup>3</sup> )	EN 542	0.89 ± 5%
Dry rest on 1 g and 30 min at 130°C (%)		± 50%
Viscosity at 25°C	(10 ± 2) % torque	

Metal	10 - 15 m <sup>2</sup> /Litre;	70 - 100 ml/m <sup>2</sup>
Concrete	3 - 4 m <sup>2</sup> /Litre;	250 - 300 ml/m <sup>2</sup>
Bitumen	ca 5 m <sup>2</sup> /Litre;	ca 200 ml/m <sup>2</sup>
Fibre cement	10 - 12 m <sup>2</sup> /Litre;	85 - 100 ml/m <sup>2</sup>

### Cleaning

White Spirit

### Packaging

5L & 25L

### Storage

Containers should be kept sealed in a cool, dry, well-ventilated environment and all practical precautions taken against fire. Partly used containers may be resealed and used again after correct storage.

To avoid the risk of spillage, always store and transport in a secure upright position.

### Shelf Life

Maximum 3 years in sealed container.

### Health & Safety

Keep container tightly sealed and away from direct heat. Keep away from sources of ignition. No smoking. Avoid contact with skin and eyes. Should there be contact with skin, wash immediately with soap and water or a recognised skin cleaner. In case of contact with eyes, rinse immediately with plenty of water and seek medical advice. In the event of accidents, seek medical attention immediately.

Do not empty into drains. Do not allow solvent vapour to enter the air intakes of the ventilation systems of buildings. A separate safety datasheet is available on request to FIX-R.

### Fire

In case of fire use foam, dry powder or CO<sub>2</sub> extinguisher, sand or earth. Never use water.



# FIX-R

Harding Way,  
St Ives,  
Cambridgeshire,  
PE27 3YJ

Tel: 01480 466777  
Fax: 01480 290133

Email: [info@fix-r.co.uk](mailto:info@fix-r.co.uk)

[www.fix-r.co.uk](http://www.fix-r.co.uk)