


# 45 x 1m

- Clean to use
- Lightweight construction
- Quick to install
- For ventilated roof construction
- Printed cutting grid
- Dual integrated tape

## TIL-R CLASSIC

**BS5534**  
ANNEX A  
WIND UPLIFT  
RESISTANCE  
✓ SUITABLE FOR  
THE FOLLOWING  
WIND ZONES

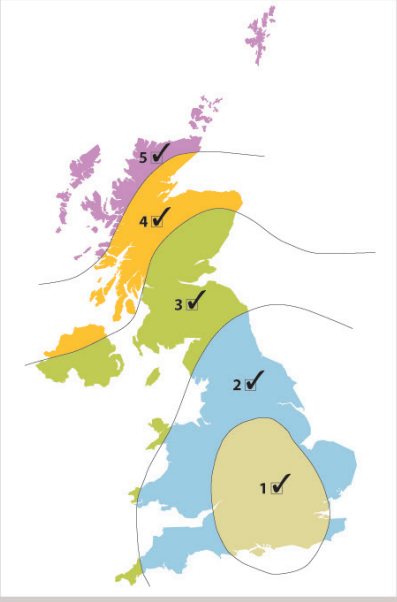

**ZONES**

|   |   |   |   |   |
|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 |
|---|---|---|---|---|

120gsm

Code: 270080010/10535550



See fitting instructions on reverse

**SIG Roofing**  
Harding Way, St Ives  
Cambridge PE27 3YJ

Tel: 01480 466 777  
Fax: 01480 290 133

Email: [info@til-r.co.uk](mailto:info@til-r.co.uk)  
Web: [www.til-r.co.uk](http://www.til-r.co.uk)

**Non Breathable**  
Pitched Roof Underlay  
Dual Integrated Tape

# PLUS

# Non Breathable Pitched Roof Underlay



## Fixing instructions for TIL-R Non Breathable Pitched Roof Underlay

### General Information:

TIL-R Non Breathable Pitched Roof Underlay is suitable for use as a fully supported or unsupported underlay in tiled or slated pitched roofs.

It must be installed in accordance with the technical data sheet and the relevant clauses of BS5534:2014 Code of Practice for slating and tiling of roofs and BS8000 Part 6:2013 Workmanship on building sites – Code of practice for slating and tiling of roofs and claddings.

Til-R Non Breathable Pitched Roof Underlay remains flexible and easy to handle even at low temperatures allowing installation to be carried out in all conditions normal for roofing work.

TIL-R Non Breathable Pitched Roof Underlay benefits from a lightweight construction and is ideal for projects with budgetary constraints.

### Installation Guidelines:

TIL-R Non Breathable Pitched Roof Underlay must always be fixed with the PRINTED side facing outwards.

The underlay is unrolled across the roof in a horizontal direction parallel with and starting at the eaves and working up to the ridge.

All TIL-R PLUS underlays should be installed using the integral tape to bond horizontal overlaps. Once the underlay has been laid and fixed into position at the correct lap, simply remove the top and bottom protective tapes and ensure laps are fully bonded. A separate tape or glue is required for the vertical sidelaps and connections to the building structure.

Where the underlay is dressed into the external gutter, it is recommended that a proprietary eaves protection product, such as TIL-R Classic Eaves Protection System, is used to provide greater protection from the effects of UV exposure (see Detail 1).

When installed in a traditional uninsulated and unsupported (open rafter) system, the underlay is fixed by draping over the rafters and securing in place with the tiling battens (see Detail 2). A drape of between 10 to 15mm is required to guide any penetrating rainwater away from the rafters to the drainage point. The membrane must not be pulled tight against the underside of the tiling batten.

When installed as a fully supported system, the underlay is laid over the support and secured using counter battens of at least 12mm thickness fixed through to the support or rafters with appropriate corrosion resistant staples or galvanised clout nails. The battens for tiling are fixed to the counter battens leaving an air space between the underlay and the tiles for drainage and ventilation (see Detail 3).

Overlaps should be installed to shed water out and down the slope and, depending on support and roof pitch, should be of the minimum dimensions given in the following table. Vertical overlaps should be 100mm and formed over a rafter position.

| Roof Pitch  | Horizontal Lap Unsupported | Horizontal Lap Supported | Vertical Lap |
|-------------|----------------------------|--------------------------|--------------|
| 12.5 to 14° | 225mm                      | 150mm                    | 100mm        |
| 15 to 35°   | 150mm                      | 100mm                    | 100mm        |
| 35°+        | 100mm                      | 75mm                     | 100mm        |

Note: TIL-R Non Breathable Pitched Roof Underlay is marked with a 150mm lap line which is correct for use on a 15 to 35° unsupported roof system.

Ensure that when detailing around service penetrations, roof lights or chimneys, the underlay is dressed a minimum of 100mm to the upstand and is effectively sealed and weathered by an appropriate flashing.

Verges: At verges, the Underlay should be lapped over the outer walling (typically brickwork) by at least 50mm. Where the verge has a constructed overhang, the underlay should be fixed to the outer rafter.

Ridges: In duo-pitched roofs, the underlay from one elevation should overlap the other by at least 150mm. In mono-pitched roofs, the underlay should be extended over the mono ridge by at least 100mm and it is recommended that the underlay is extended to provide protection to the ends of roof timbers.

Hips and valleys: These should be covered with a separate 600 mm wide strip of Underlay.

Abutments: The underlay should be returned up the abutment by at least 75mm and covered by a proprietary flashing.

TIL-R Non Breathable Pitched Roof Underlay is designed as a secondary barrier to wind driven rain and snow and should not be considered as a primary waterproofing layer. Good roofing practice is to install the primary waterproof covering (e.g. tiles, slates) as soon as practically possible. Whilst providing some protection, TIL-R Non Breathable Pitched Roof Underlay should not be considered as a totally weatherproof protection for occupied buildings or when internal fitting out is taking place.

